

## TGX Forklift lifting beam

Use the forklift lifting beam to lift and transport loads with a forklift truck like a crane.

Our forklift lifting beam is available for loads of up to 5.3 tonnes and impresses with its particularly low height.

As standard, the lifting beam is equipped with a central swivel hook for lifting loads, but can also be fitted with additional attachment points, crane arms and special attachments.

Type	Load kg	A mm	B mm	C mm	D mm	Weight kg
TGE 2,0	2000	430	246	150	70	14
TGE 3,15	3150	396	274	184	84	19
TGE 5,30	5000	396	310	184	84	20

### Notes & Standards

DIN EN 13155, directive 2006/42/EG, DIN EN ISO 12100, DGUV rule 109-017, eyelets for crane hooks according to DIN 15401, Inspection before initial commissioning is made by a competent inspector of the client.

Application range: Load change up to 16,000, Temperature -20° to +80° C

Warranty 12 months after delivery (wearing parts excluded). Delivery with documentation (type plate with CE marking and test book - EC declaration of conformity, test certificates, operating instructions and release drawing).

**LOADLIMIT**



### Customized products

Deviating from our standard models we also produce according to your special requirements.




### Standard versions

- Load capacity 2.0 t - 3.15 t - 5.3 t
- Forklift mounts with locking device
- Load suspension with swivel hooks
- Can be upgraded with special attachments

**TGB TGX**

**Pallet cage & forklift beams**

 **Quality**  
**Made in Germany**

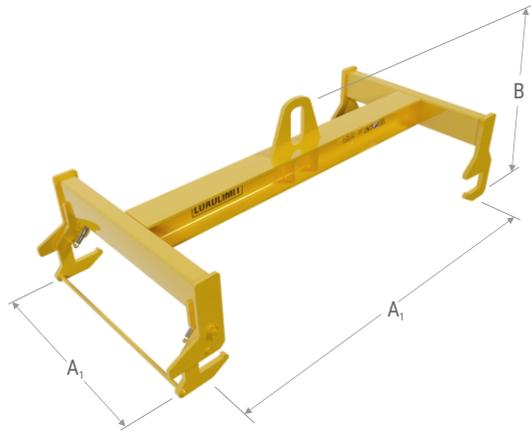

## TGB Pallet cage lifting beam

The pallet cage lifting beam allows the safe transport of standard pallet cages according to DIN 15155/8 - UIC 435-3 by crane.

The lifting beam has two fixed and two movable hooks, which are connected by a handle bar, to hold the pallet cage.

Depending on the version, the crane is attached by crane eye, rings (for single or double hooks) or shackles to a perforated bar.

The lifting beam is available with a load capacity of up to 3,000 kg, in painted steel, galvanised steel or stainless steel.

Model	Load kg	A <sub>1</sub> mm	A <sub>2</sub> mm	B mm	Weight kg
TGB 1,0 / 1240 - 810	1000	1175	600	430	42
TGB 2,0 / 1240 - 810	2000	1175	600	480	51
TGB 3,0 / 1240 - 810	3000	1175	600	505	69

### Notes & Standards

DIN EN 13155, directive 2006/42/EG, DIN EN ISO 12100, DGUV rule 109-017, eyelets for crane hooks according to DIN 15401, Inspection before initial commissioning is made by a competent inspector of the client.

Application range: Load change up to 16,000, Temperature -20° to +80° C

Warranty 12 months after delivery (wearing parts excluded). Delivery with documentation (type plate with CE marking and test book - EC declaration of conformity, test certificates, operating instructions and release drawing).


### Customized products

Deviating from our standard models we also produce according to your special requirements.



### Standard versions

- For standard pallet cages
- Load capacity 1 t to 3 t
- Crane eye, rings or shackles on perforated bar
- Pallet hooks - 2 x rigid and 2 x swingable

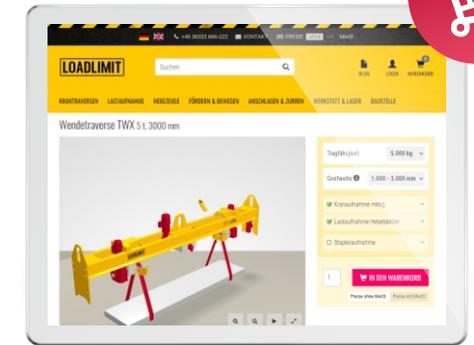

## LOADLIMIT.COM

Configure lifting beams online



ONLINE-SHOP  
**LOADLIMIT.COM**



TELEPHONE  
**+49 36333 666-222**

LOADLIMIT®  
Nordhäuser Straße 2  
99765 Heringen  
Germany